



# XTREME

## SMART SWITCH

Control lights, fans, curtains and more with the XtremeSwitch. Automate your home through time scheduled operations and IFTTT, scene control, touch, app and voice control. Available in 1,2,3 or 4 gang, select from button or touch, and from a range of sleek designs, colours and finishes to suit your home, office or building.



Energy  
Statistics



Easy installation



Various devices



IFTTT



Scene Control



Zigbee



Certified to Australian Standards



Time Scheduled  
Operations



## WARNING


- ⓘ RISK OF ELECTRIC SHOCK
- ⓘ The switch can only be installed by a licensed electrician.
- ⓘ Installing the Interfree XtremeSwitch involves high voltage wiring. Please follow the instructions carefully
- ⓘ Ignoring the safety precautions, or improper installation or use of this product may cause electrocution, and injury.
- ⓘ The resistive load is 300W a gang. Overload will damage the switch.
- ⓘ The interfree XtremeSwitch is designed only for interior use and should not be exposed



**Note :** Your safety is important to us. Electricity is dangerous and can cause personal injury and property damage if handled improperly. This product must be installed by a qualified electrician.

## Product Features

- ④ Australian Standard Certified
- ④ Easy QR Code Installation.
- ④ Completely Secure and stable connectivity
- ④ High quality Tempered glass panel design.
- ④ Overload and Overheat protection.
- ④ Application Controls: your devices remotely Anytime, Anywhere via the interfree App
- ④ View and change the ON/OFF status of the XtremeSwitch via the app
- ④ Geofencing: Set location triggers so that your light turns on automatically when you arrive.
- ④ Scheduling: Add efficiency and convenience to your daily routine with dynamic schedules
- ④ Scene control
- ④ ON/OFF can be used to trigger an automation rule.
- ④ Integration with more advanced setups
- ④ Compatibility with platforms: Android, Apple, Google home, Alexa
- ④ Each gang is equipped with an individual built in energy meter
- ④ Real time dollar value energy consumption monitoring

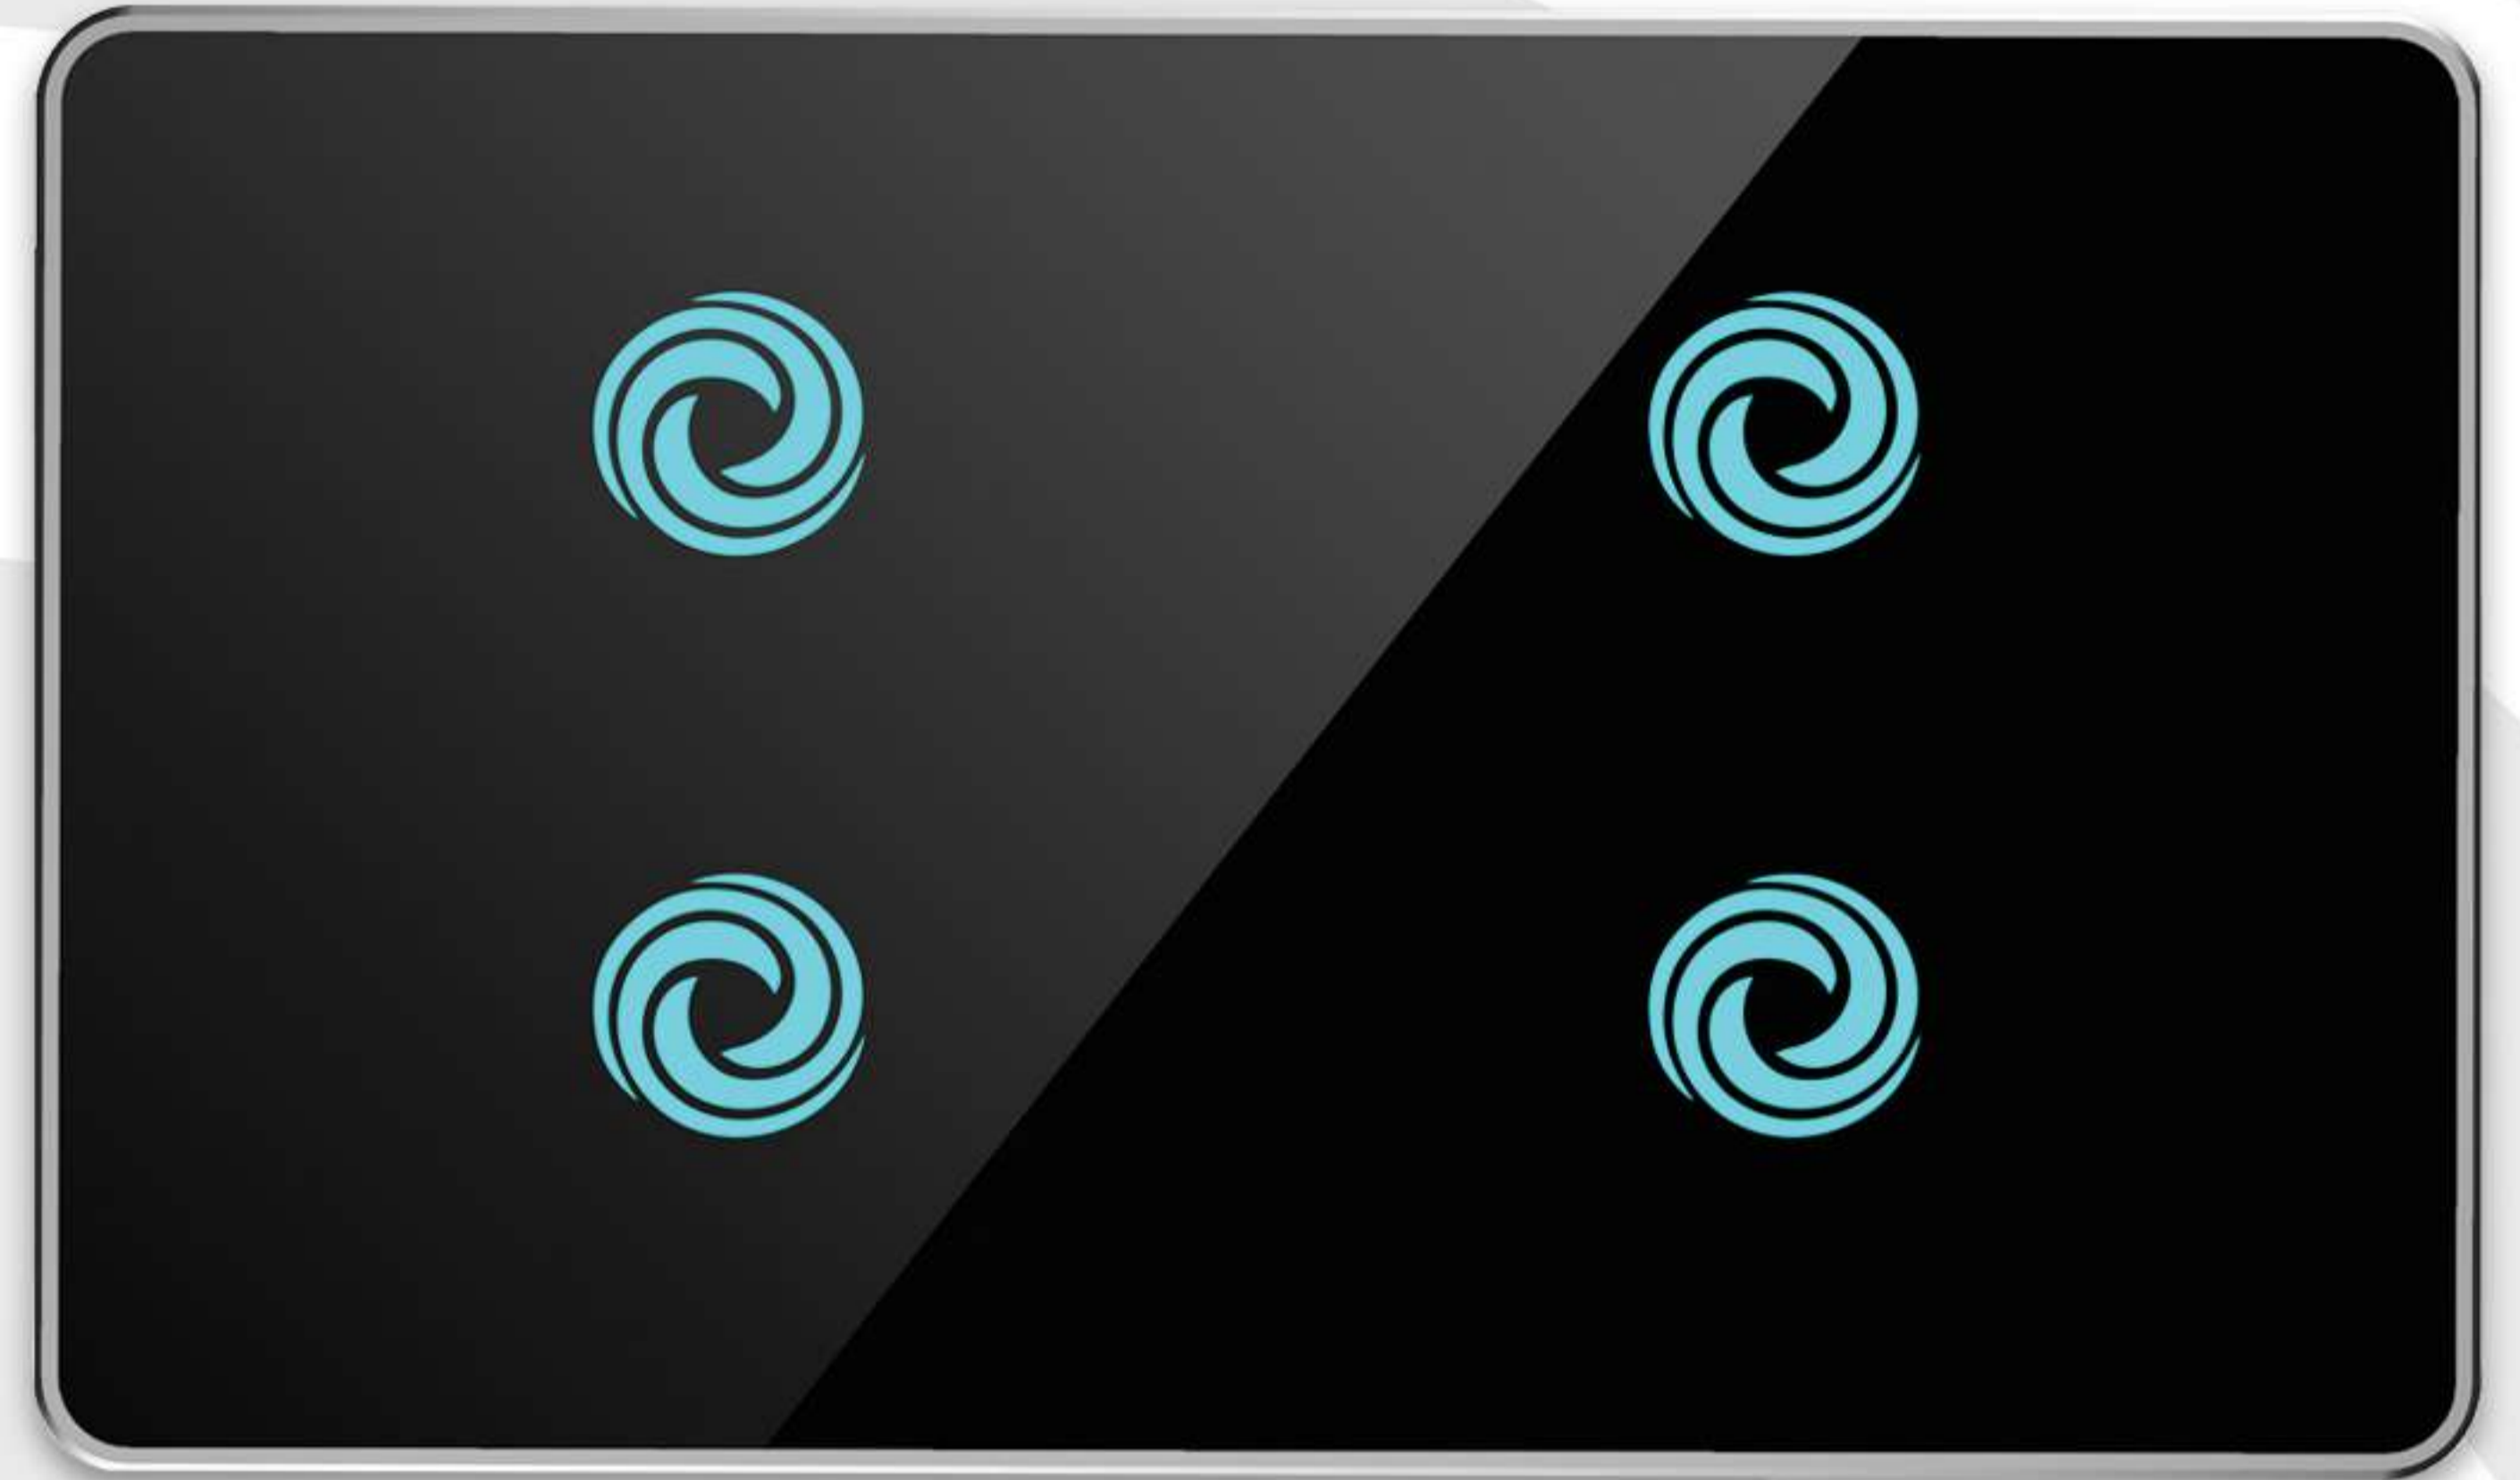


## Products Technical Details

Available Color	White/ Black/ Rose Gold
Style	Touch/ Button
Available	1,2,3 and 4 Gangs
Working temperature	20
Power	1.2W
Voltage	AC 100 - 240 V
Standby power consumption	2.86W
Working temperature	-20°C to 60°C
Wattage	300/switch (LED), 2000W/switch (Incandescent lamp)
Communication protocol	Zigbee 2.4Gs
Installation Method	Australian standard wall mounting
QR code networking	Yes

## Dimensions

Dimensions	Front wall 120x72 mm Wall cavity 70x50 mm Depth 42mm
Weight	142g

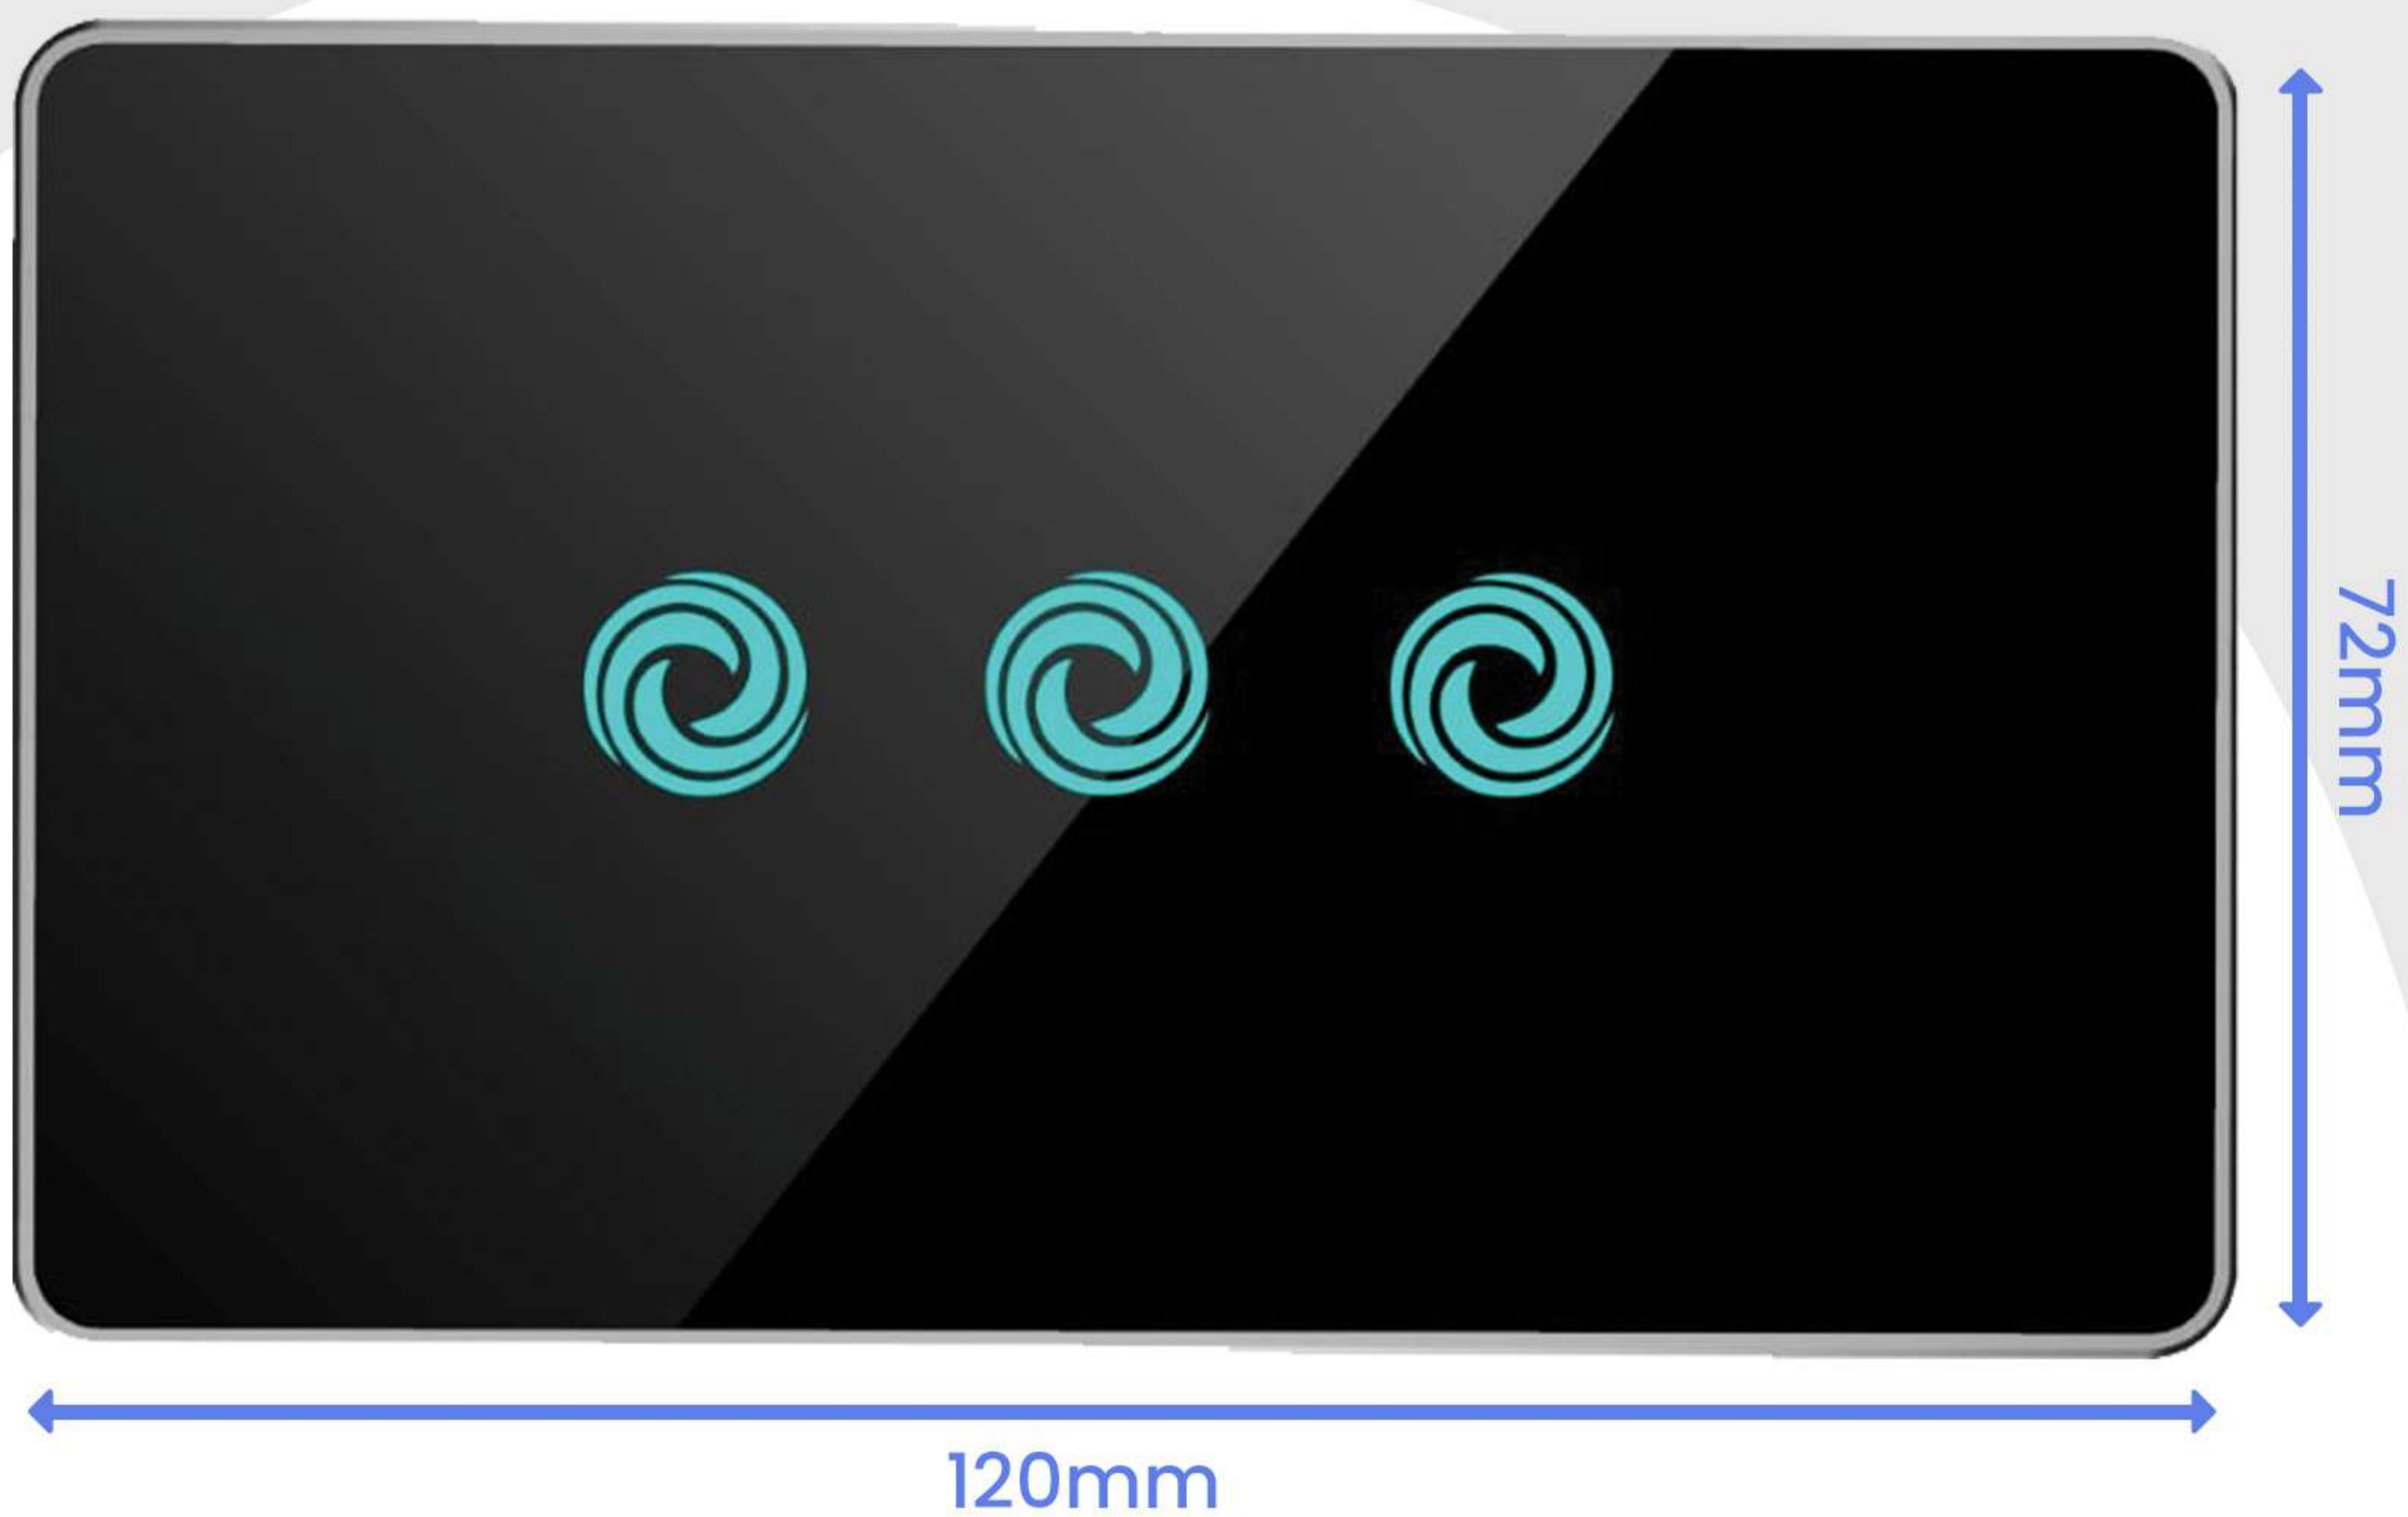

## Description for packaging details

1\* Smart Xtremeswitch

1\* User Manual

1\* Mounting Screws

## Wiring


The Interfree Switch can be connected to one, two, three or four independent lighting loads. The following steps will show you how to wire every individual case using the L1, 2 and 3 positions. To connect each wire, insert it into the hole on the back of the device and tighten the screw (Figure 1)

- 1 Identify & connect the LIVE wire into the L position
- 2 Identify if the Neutral wire is present, and if it is, connect the NEUTRAL wire into the NEUTRAL position
- 3 Connect the loads to the L1, L2 and L3 positions: Start with the L1 as the main light

If you are only connecting 1 load, use L 1

If you are connecting 2 loads, use L1 and L2

If you are connecting 3 loads, use L1, L2 and L3

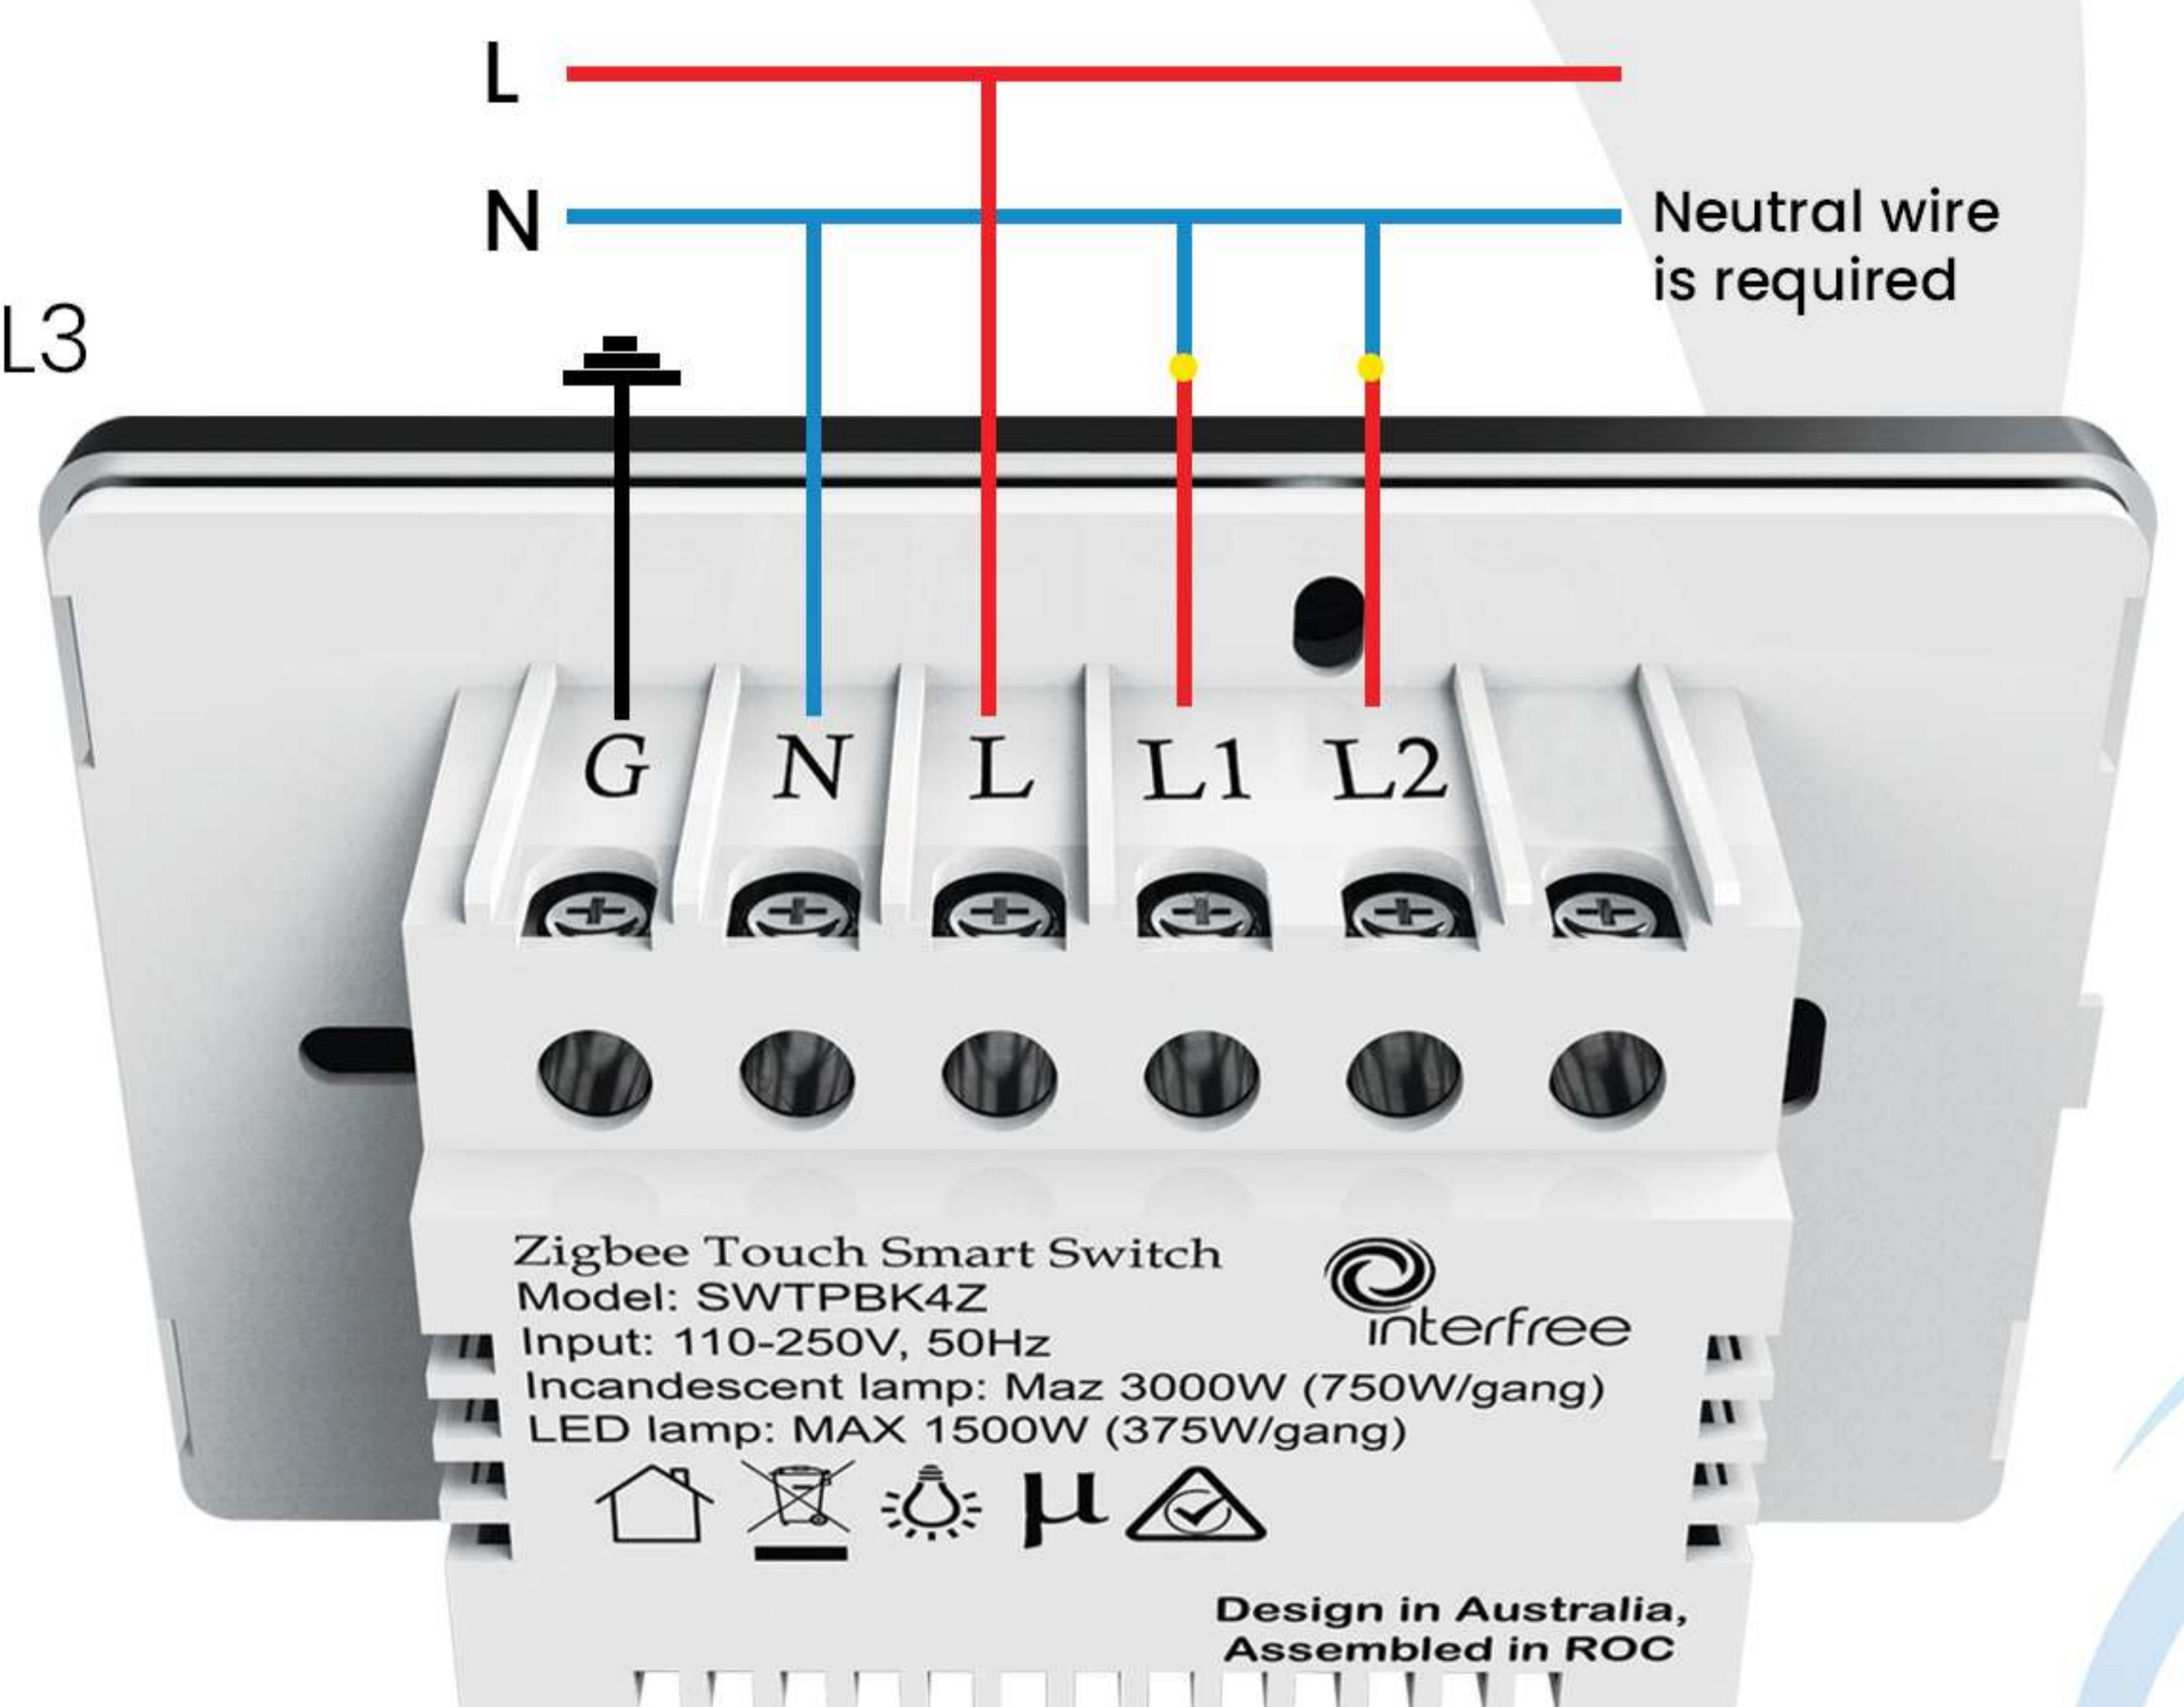

**PLEASE NOTE :** Please wire up the switch strict accordance with the diagram in the prevention of any damage to the switch. This product must be installed by a qualified electrician.

## Installation

**Step 1:** Use a flat screwdriver to open the switch glass panel;

**Step 2:** Connect wires to terminate as the wiring diagram.

**Step 3:** Screw the switch into the switch rack.

**Step 4:** Snap on the panel

### Attention:


- When installing, make sure the power is off;
- The switch can only be installed by a licensed electrician.

**Step 4:** Download the Interfree Application

Please use your phone to scan the QR code or search "Interfree" APP in APP store or Google play.




Download Now

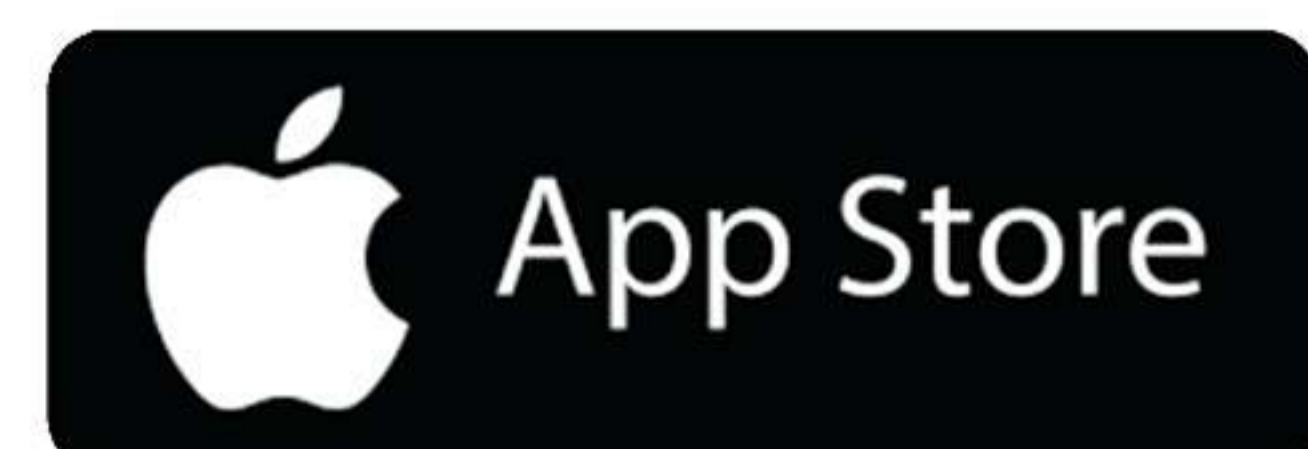


## Step 5: Scan the QR code on device.


Please use your phone to scan the QR code or search “Interfree” APP in APP store or Google play.

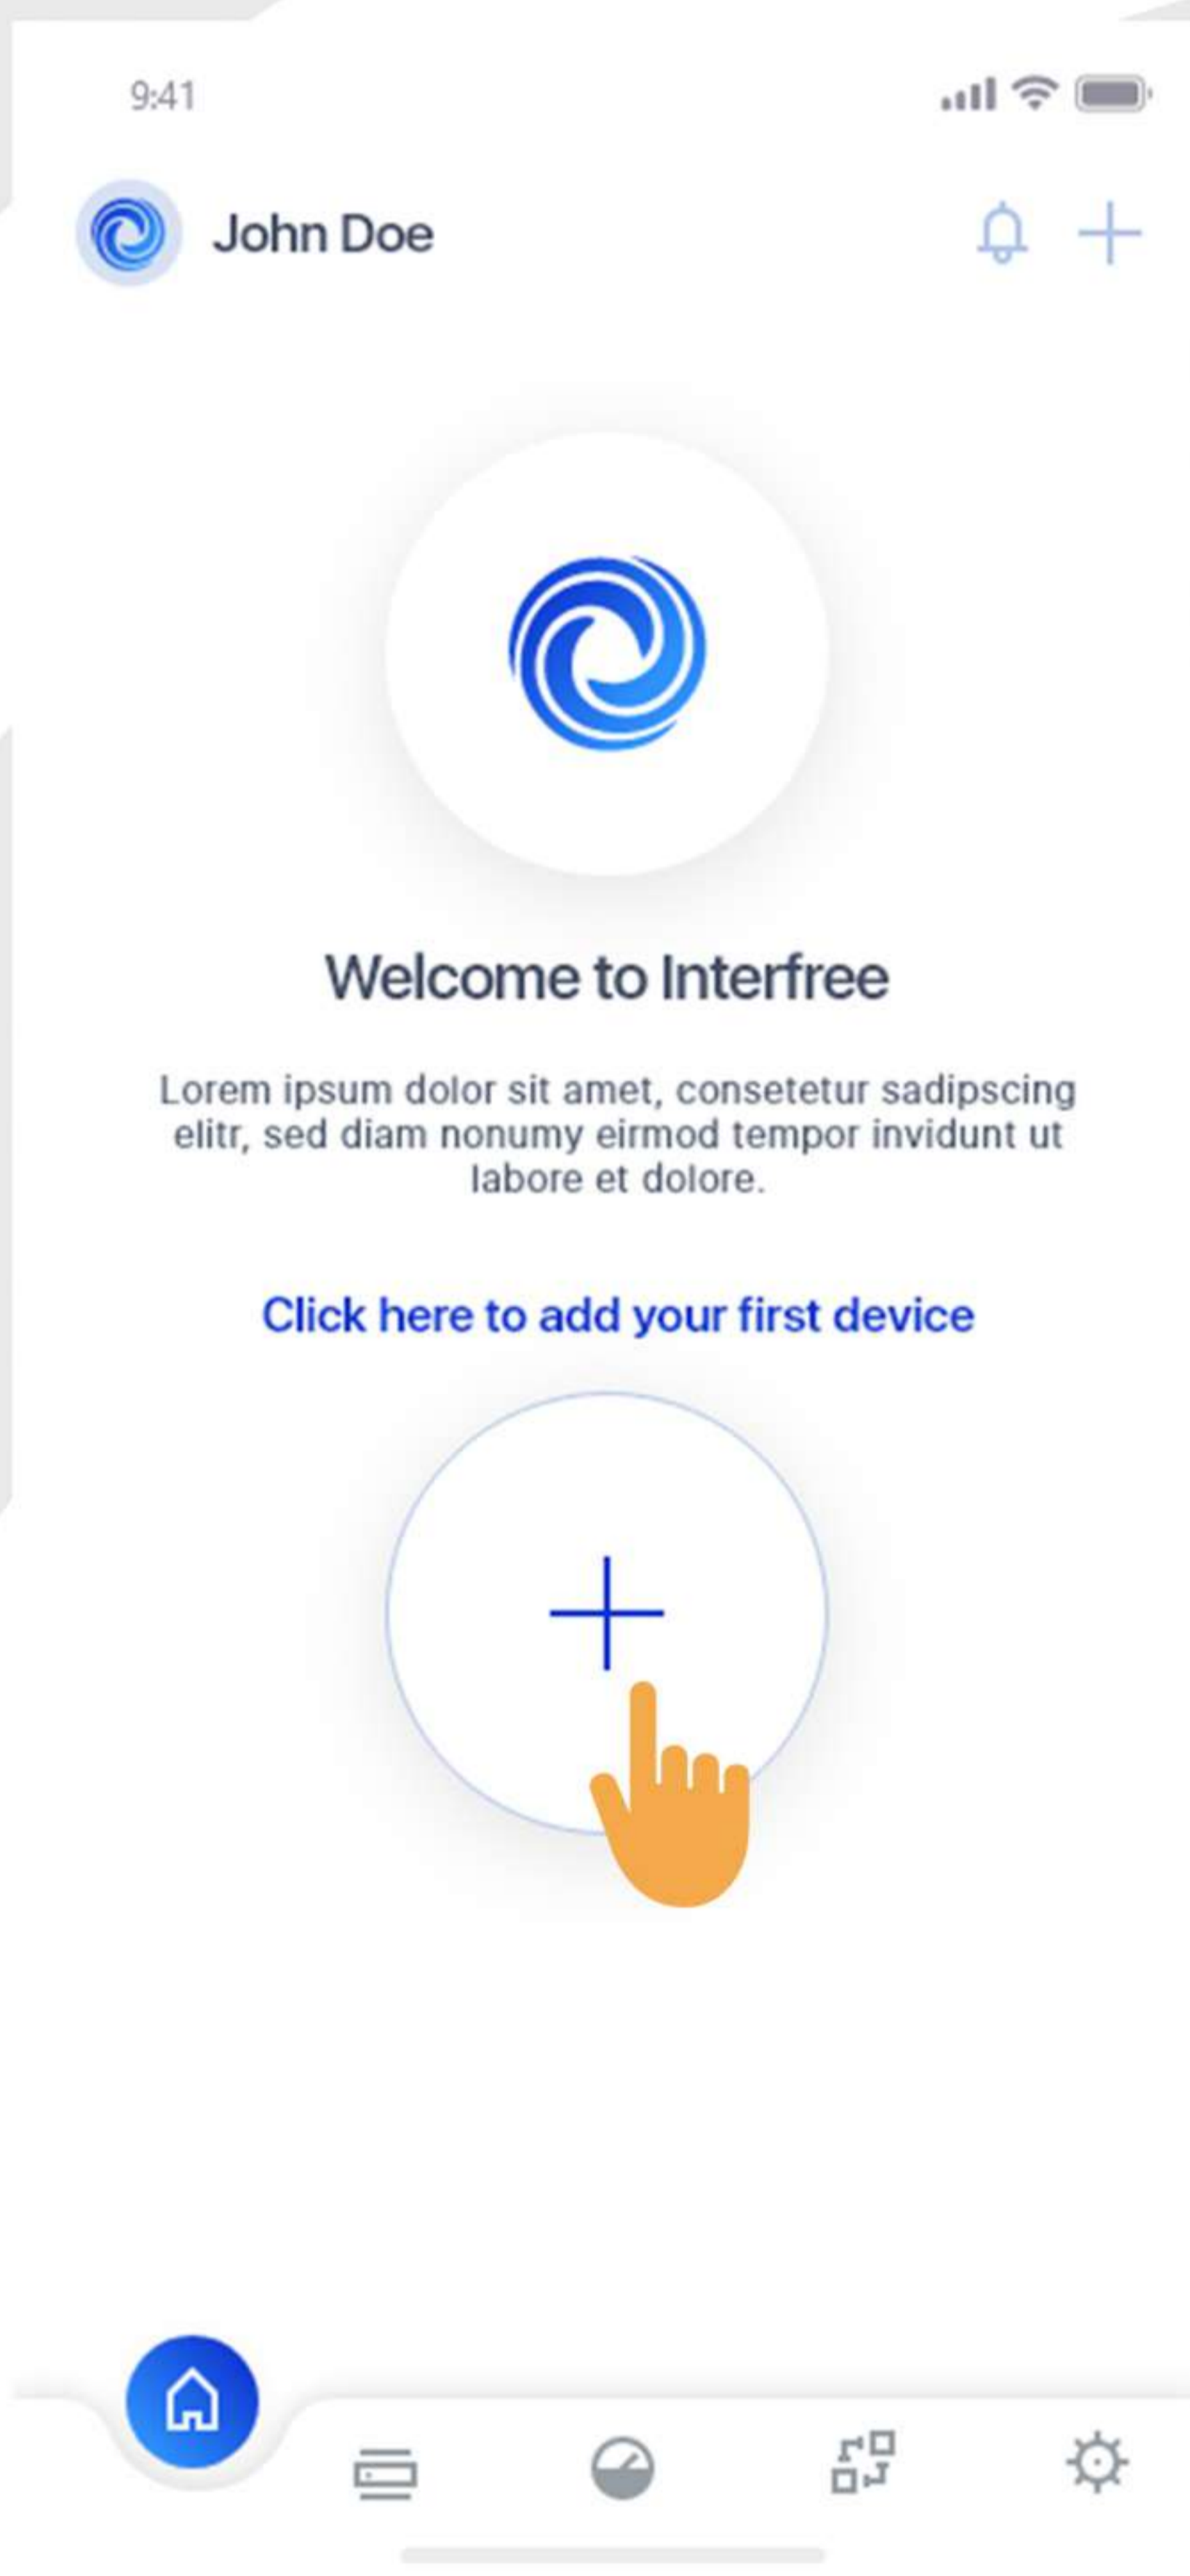

Click on the “+” icon to add device to the network

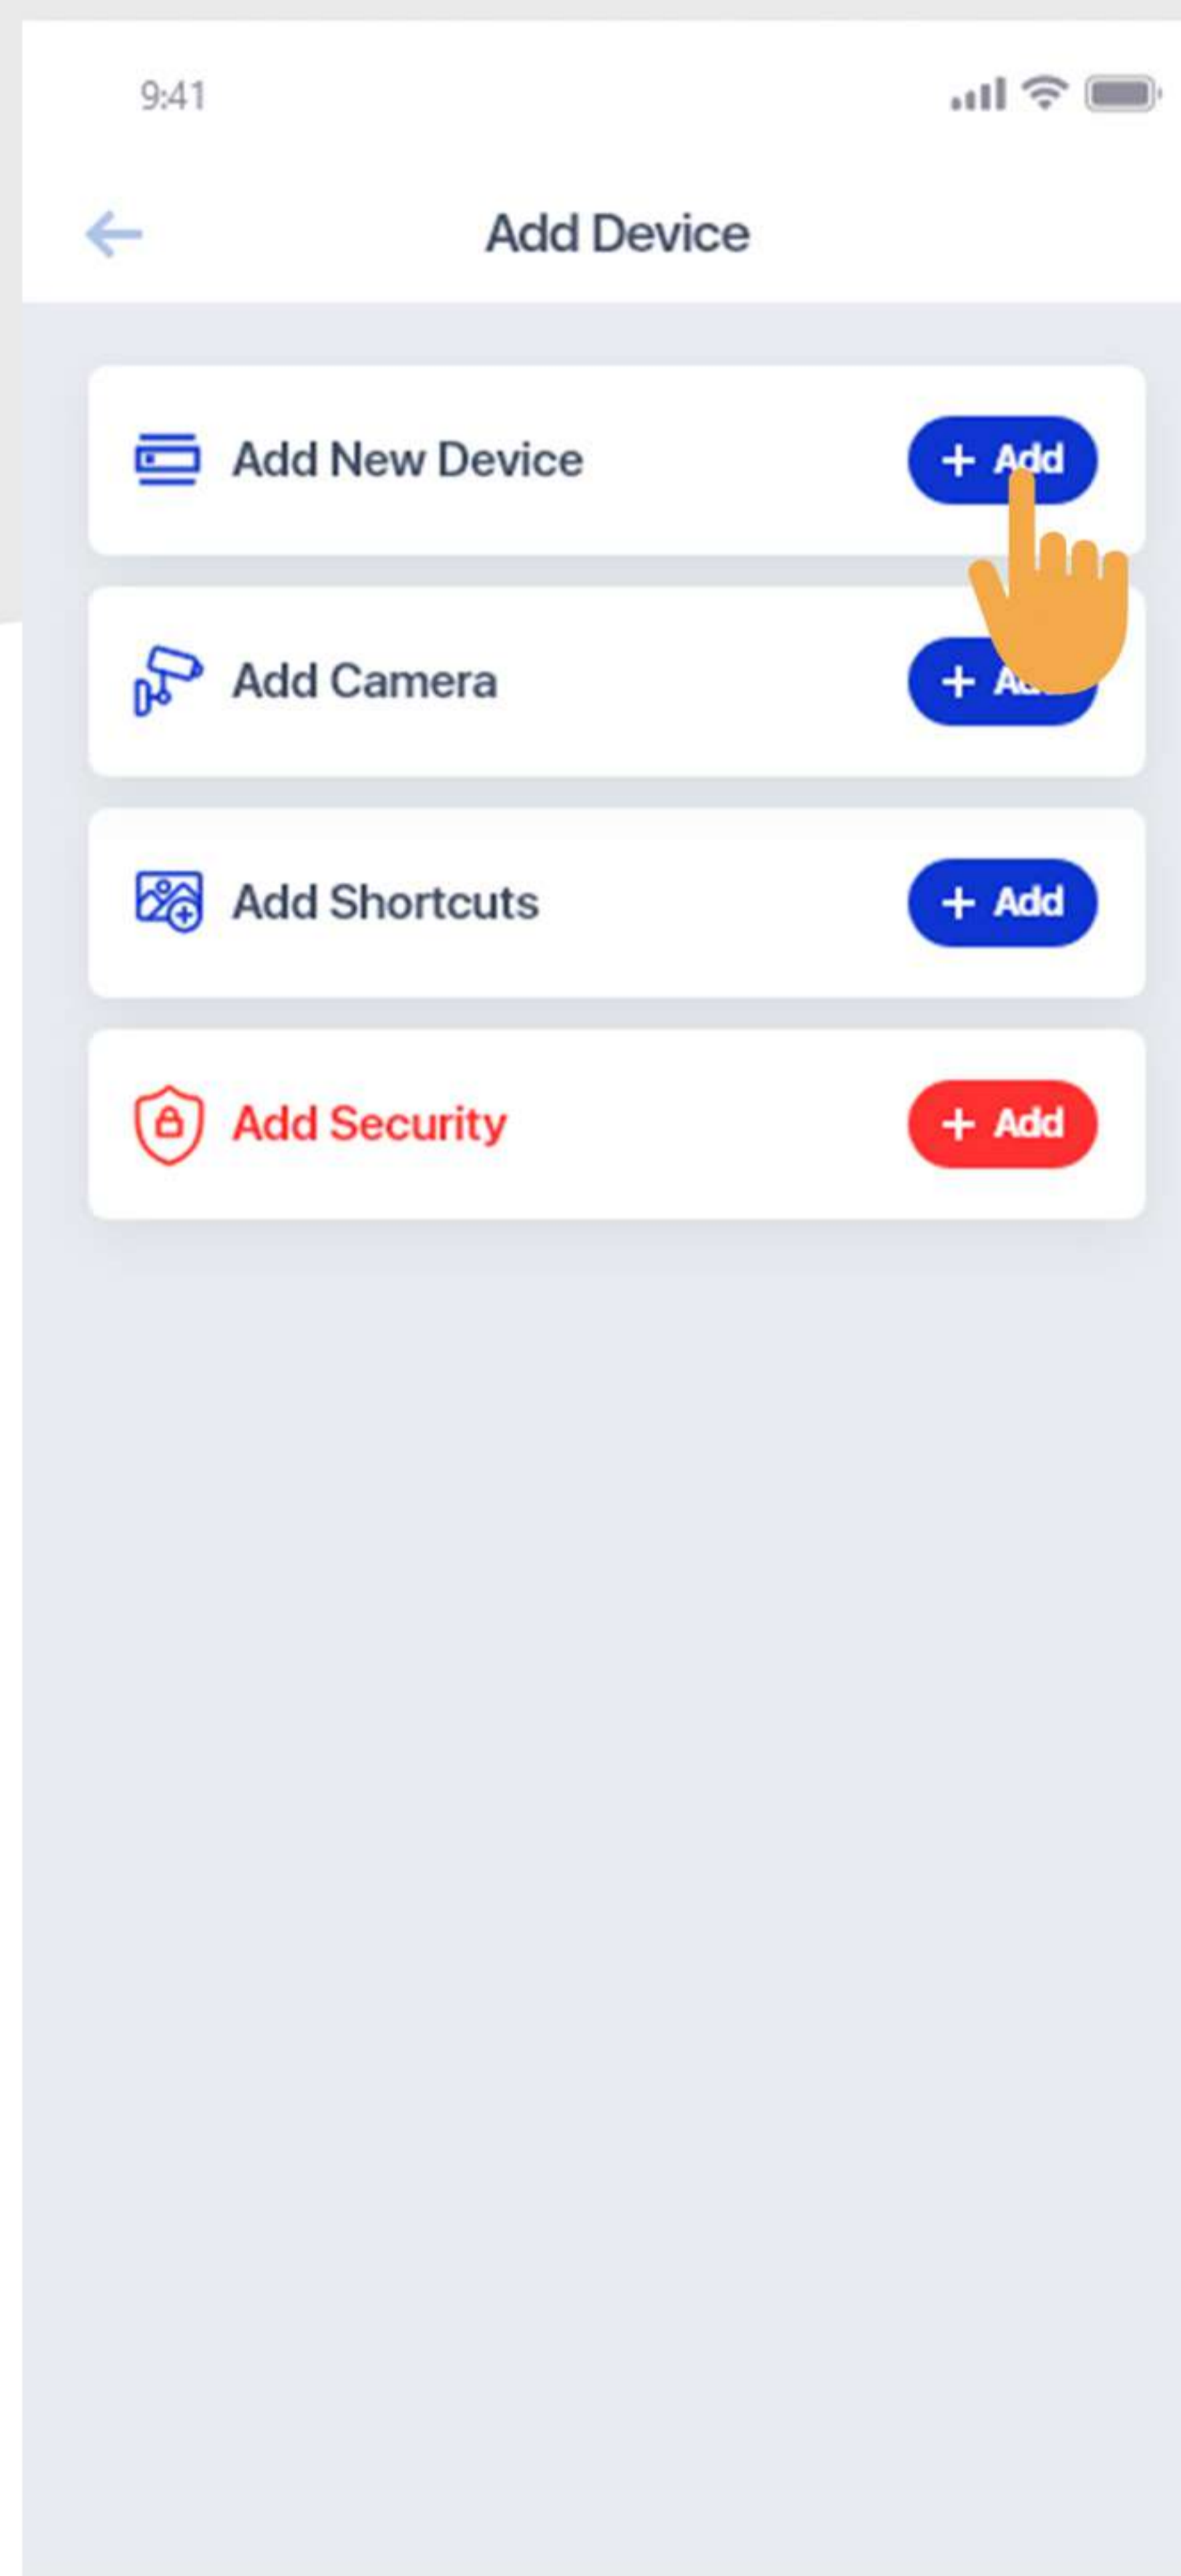

By clicking on “+Add” you can add as many devices to the interfree’s network

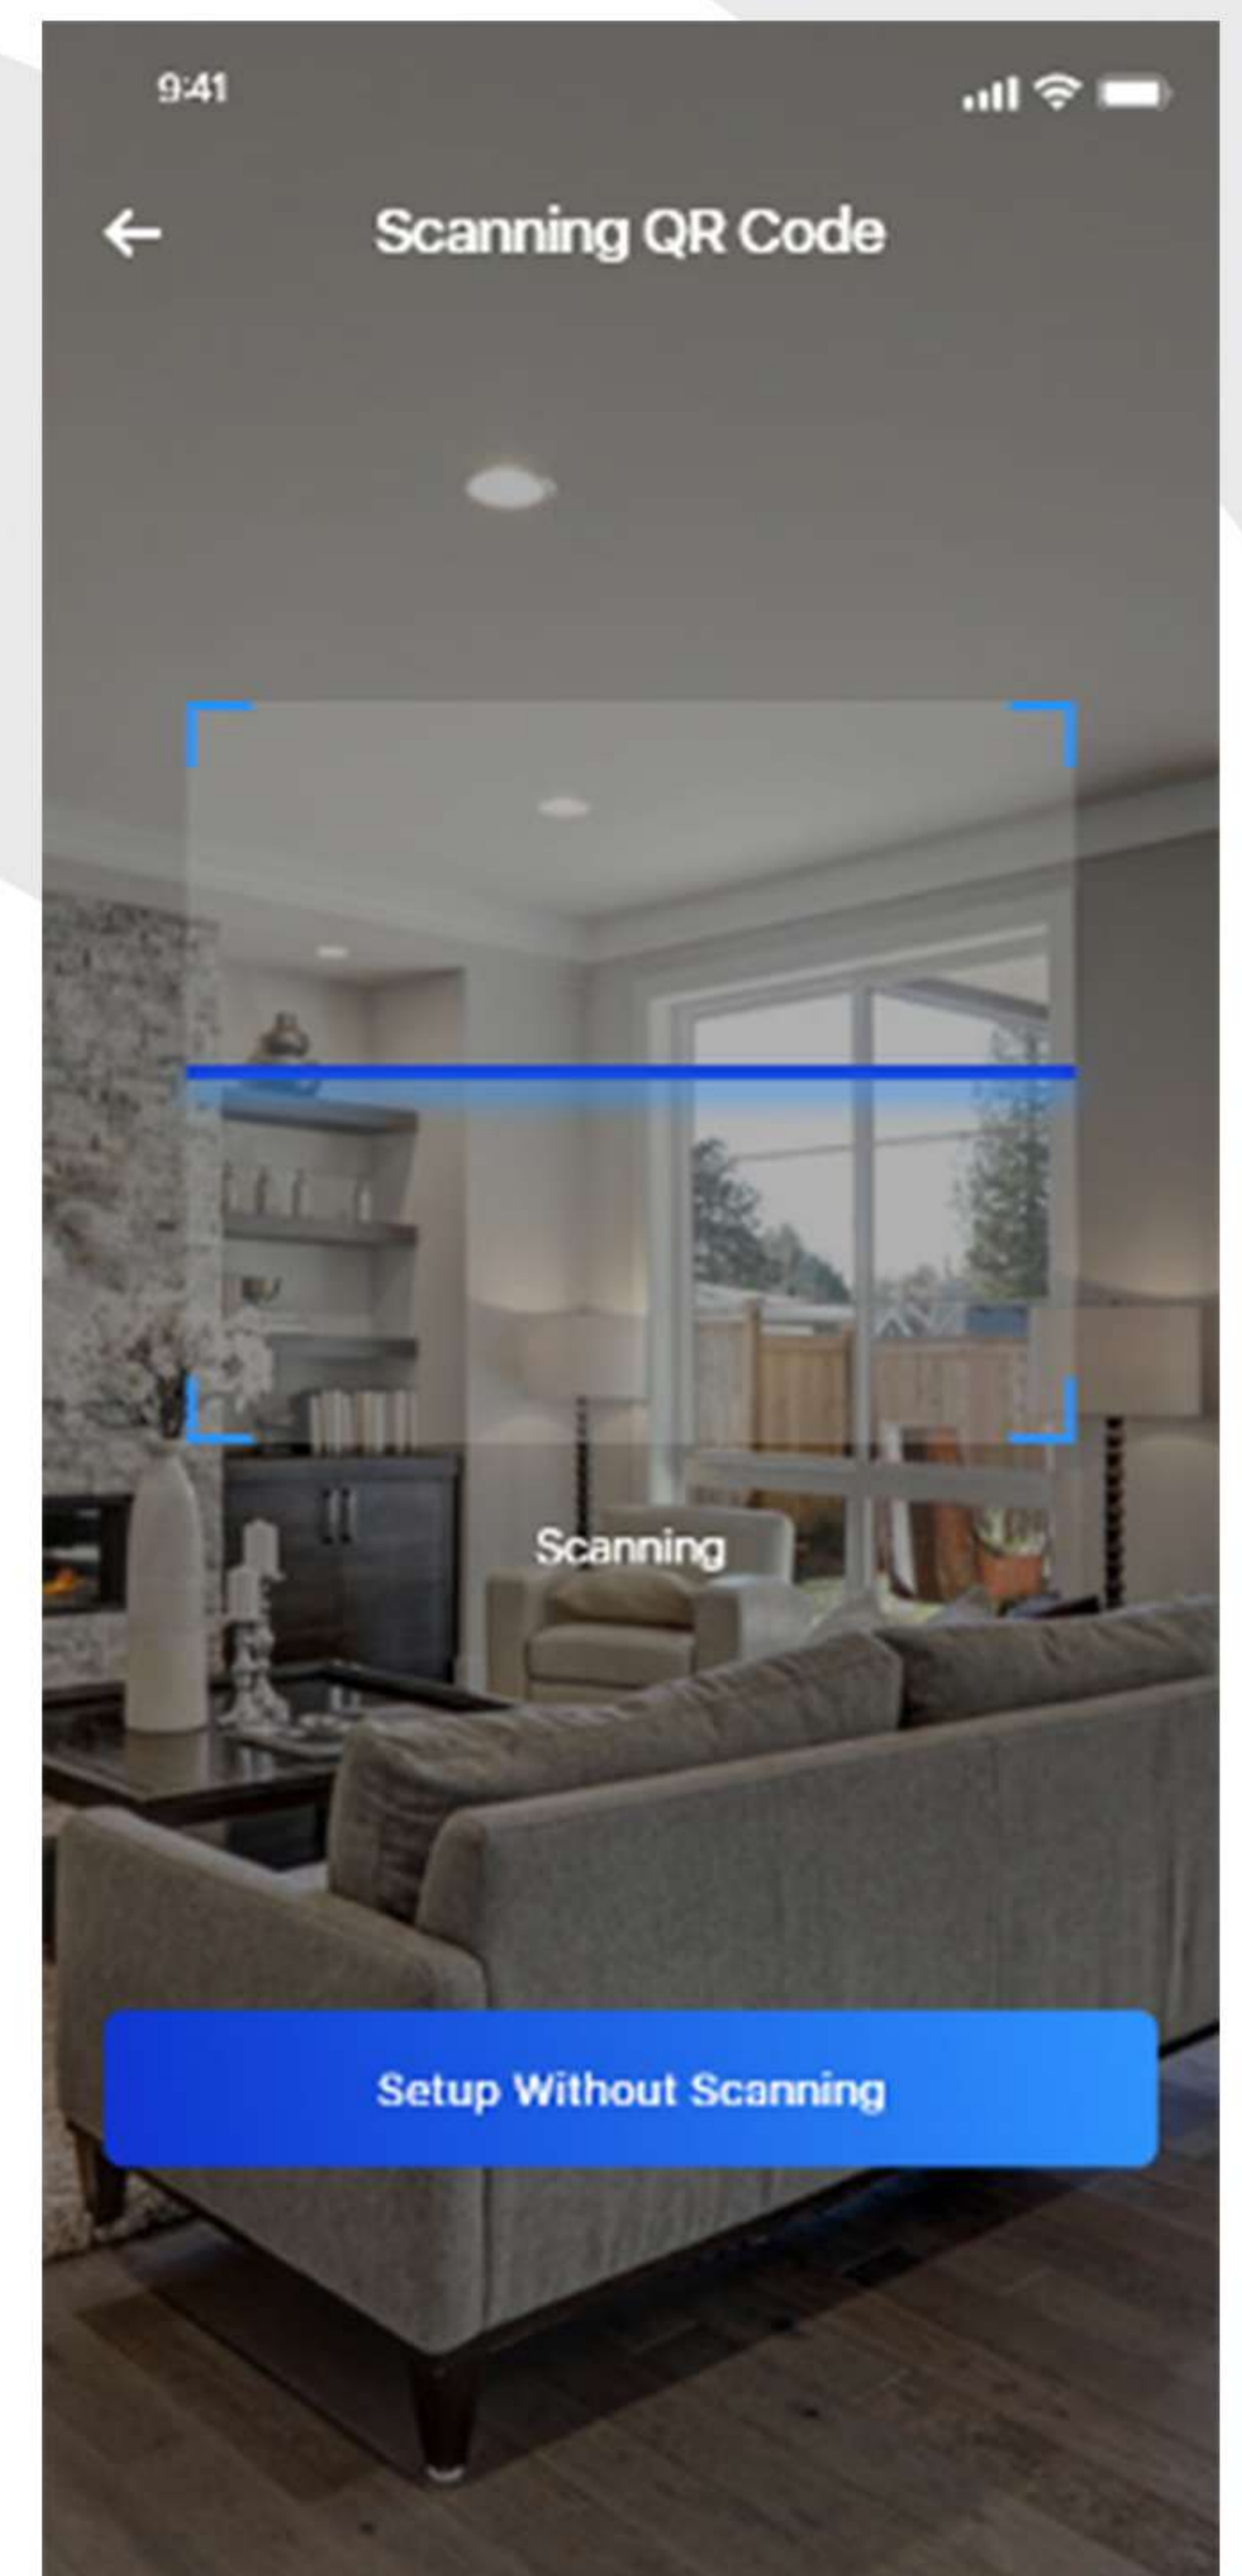


Scan the QR code on device

**Note:** Add the Switches first that are closer to the gateway. This will enhance the Zigbee range.



**Step 6:** If you scan the device and it doesn't appear online on the app, try resetting the device by simply switching on the Zigbee network for advanced setting of the gateway, and hold down the gang button for 10 seconds.

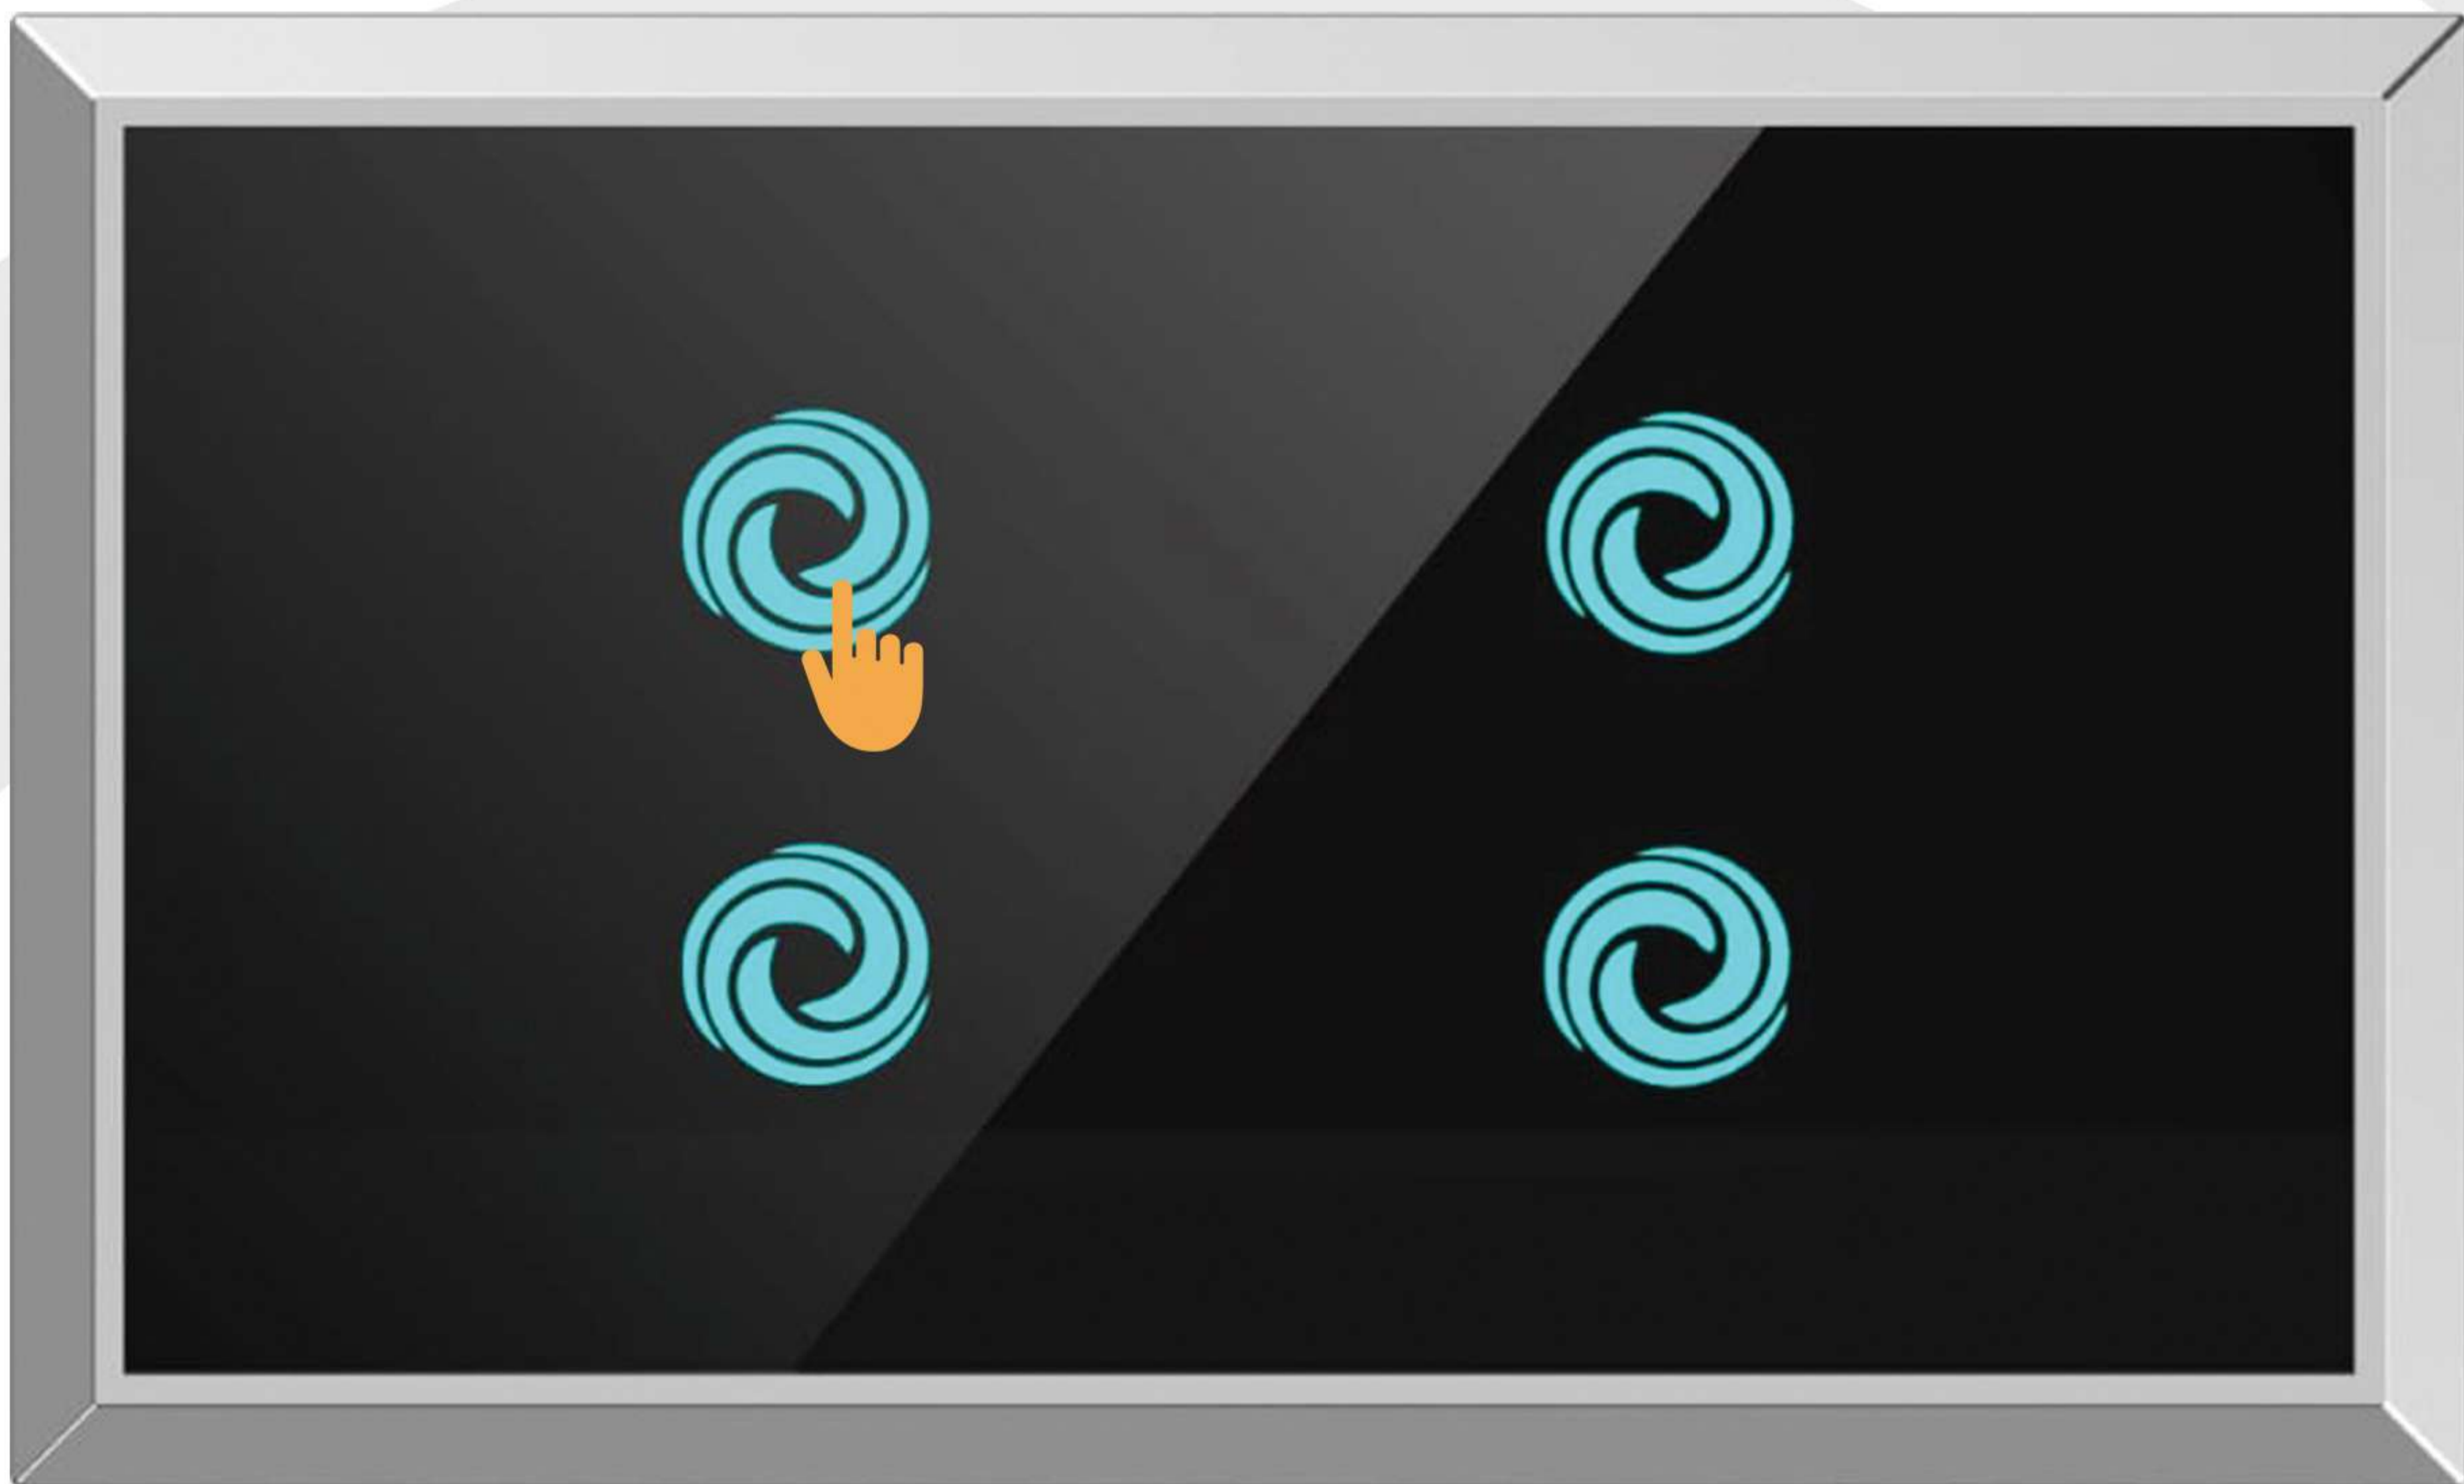



**Xtreme**  
SMART SWITCH

 33 Glenvale Crescent Mulgrave VIC 3170 Australia

 [interfree@interfree.com.au](mailto:interfree@interfree.com.au)

 [www.interfree.com.au](http://www.interfree.com.au)